


G12M Greenback



The G12M Greenback has evolved over the decades but still retains its essential, sought-after tone. Angus Young has been a Greenback devotee since the early days of AC/DC. This model is voiced with additional broad mid-range attack and restrained top-end to give a forward, punchy attitude to chords and a searing lead tone without fizz. With its well-controlled low-end it can be used singly in low-powered amps, or in multiples for high-power rock heads. It's an ideal speaker to bring drive and definition to modern high gain amps.

8 Frequency Response

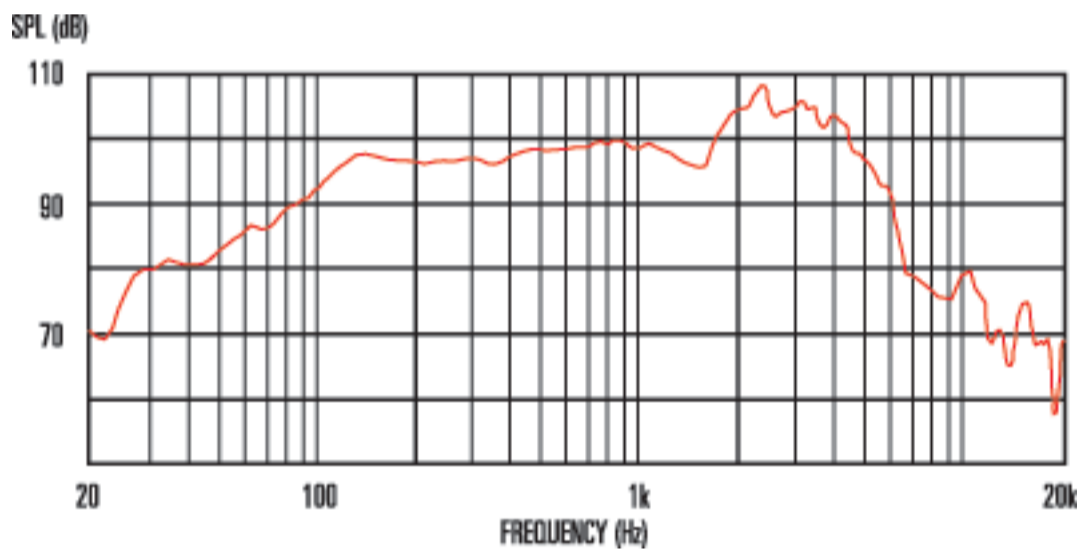

General Specifications

| | |
|-------------------------|-----------------------|
| Nominal diameter | 12", 305mm |
| Power rating | 25Wrms |
| Nominal impedance | Available 8 or 16 |
| Sensitivity | 98dB |
| Chassis type | Pressed steel |
| Voice coil diameter | 1.75", 44.5mm |
| Voice coil material | Round copper |
| Magnet type | Ceramic |
| Magnet weight | 35oz, 0.99kg |
| Frequency range | 75-5000Hz |
| Resonance frequency, Fs | 75Hz |
| DC resistance, Re | Available 6.7 or 13.1 |

Mounting Information

| | |
|---------------------------|----------------|
| Cut-out diameter | 11.1", 283mm |
| Diameter | 12.2", 309mm |
| Magnet structure diameter | 5.9", 150mm |
| Mounting slot dimensions | 0.31", 7.9mm Ø |
| Mounting slot PCD | 11.7", 297mm |
| Number of mounting slots | 4 |
| Overall depth | 5.1", 130mm |
| Unit weight | 7.9lb, 3.6kg |